


**DIN 1530/ISO 8696**

**Skaft: 60-62 HRc**

**Hoved: 40-50 HR**

**Mat.: WS-1.2067**

**Leveres også nitreret**

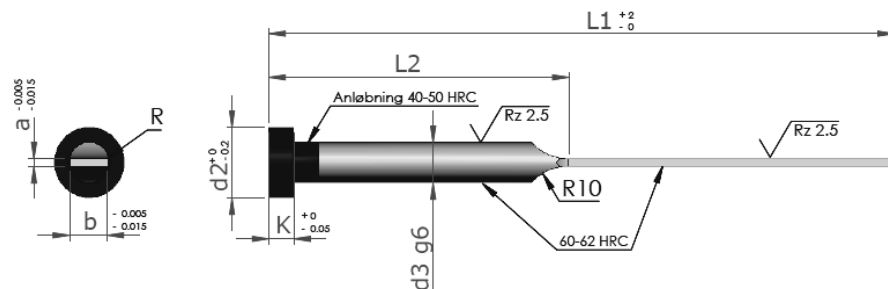

**Bestillingsnr.: F / b-a-L1**

a	b	d3	d2 0 -0,02	K 0 -0,05	L1												
					63	80	100	125	160	200	250	315					
					L2												
					30	40	50	60	80	100	125	160					
1,0	3,5	4,2	8	3													
0,8	3,8																
1,0																	
1,2																	
1,0	4,5	5,0	10	3													
1,2																	
1,5																	
1,0																	
1,2	5,5	6,0	12	5													
1,5																	
2,0																	
1,2																	
1,5	7,5	8,0	14	5													
2,0																	
1,5																	
2,0																	
1,5	9,5	10,0	16	5													
2,0																	
2,0																	
2,5																	
2,0	11,5	12,0	20	7													
2,5																	