


DIN 9861

Ståltype: HSS ~1.3343

Skaft 60 - 62 HRC

Hoved 50 - HRC

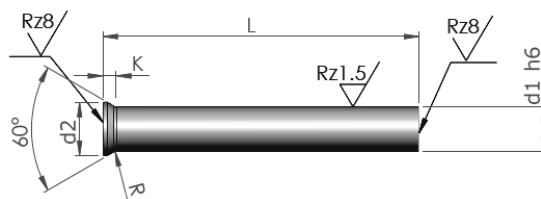

Bestillingsnr.: LOK - Ø x L x Form

Ø d1 TOL h6	d2	K 0,02	R	Pris					
				L 71 mm	L 80 mm	L 100 mm	L 130 mm		
0,6	1,1	0,2	0,2		-	-	-		
0,7	1,3				-	-	-		
0,8	1,4	0,4	+0,2/0		-	-	-		
0,9	1,6				-	-	-		
1,0/1,1	1,8	0,5	0,4 +0,3/0				-		
1,2/1,3	2,0						-		
1,4/1,5	2,2						-		
1,6/1,7	2,5						-		
1,8/1,9	2,8						-		
2,0	3,0						-		
2,1/2,2	3,2						-		
2,3/2,5	3,5						-		
2,6/2,9	4,0						-		
3,0/3,4	4,5						-		
3,5/3,9	5,0	0,6	+0,4/0						
4,0/4,4	5,5								
4,5/4,9	6,0								
5,0/5,4	6,5								
5,5/5,9	7,0								
6,0/6,4	8,0								
6,5/7,4	9,0			1,0	1,0 +0,5/0				
7,5/8,4	10,0								
8,5/9,4	11,0								
9,5/10,4	12,0								
10,5/11,4	13,0								
11,5/12,4	14,0								
12,5/13,4	15,0	1,5	1,5 +0,5/0						
13,5/14,4	16,0								
14,5/15,0	17,0								
15,1/16,0	18,0								
16,1/17,0	19,0								
17,1/18,0	20,0								
18,1/19,0	21,0								
19,1/20,0	22,0								
20,1/21,0	23,0						-		
21,1/22,0	24,0						-		
22,1/23,0	25,0	2,0	+0,5/0				-		
23,1/24,0	26,0						-		
24,1/25,0	27,0						-		