


DIN 16756/ISO 8405

Skaft: 60-62 HRC

Hoved: 40-50 HR

Mat.: WS-1.2067

Leveres også nitret

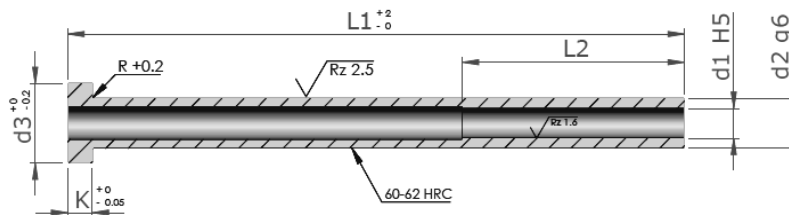

Bestillingsnr.: R - d2 x d1 x L1

d1H5	d2g6	d3		K	L2	L1								
		0-0,02	0-0,05			75	100	125	150	175	200	225	250	
1,6	3	6	3	3	35									
2,0	4	8	3	3	35									
2,2	4	8	3	3	35									
2,5	5	10	3	3	35									
2,7	5	10	3	3	35									
3,0	5	10	3	3	45									
3,2	5	10	3	3	45									
3,5	6	12	5	5	45									
3,7	6	12	5	5	45									
4,0	6	12	5	5	45									
4,2	8	14	5	5	45									
5,0	8	14	5	5	45									
5,2	8	14	5	5	45									
6,0	10	16	5	5	45									
6,2	10	16	5	5	45									
8,0	12	20	7	7	45									
8,2	12	20	7	7	45									
10,0	14	22	7	7	45									
12,0	16	22	7	7	45									