


DIN 1530/ISO 8694

Skaft: 60-62 HRC

Hoved: 40-50 HR

Mat.: WS-1.2067

Leveres også nitreret

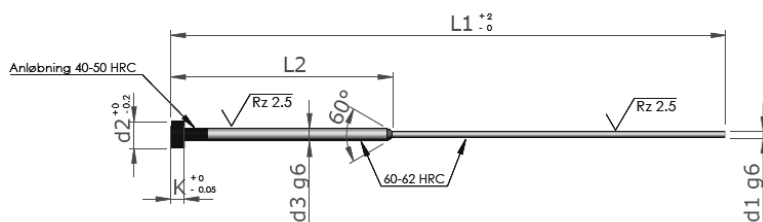

Bestillingsnr.: UDST-d1 x L1-CH

d1 g6	d3 g6	d2 0 -0,02	K 0 -0,05	L1				
				100	125	150	160	200
				L2				
				50	50	50	75	75
0,8	2,0	4	2,0					
0,9								
1,0								
1,1								
1,2								
1,3								
1,4	3,0	6	3,0					
1,5								
1,6								
1,7								
1,8								
1,9								
2,0								
2,1								
2,2								
2,2								
2,4								
2,5								
2,6								
2,7								
2,8								
2,9								